





# 2SC4055

$h_{FE} - I_C$

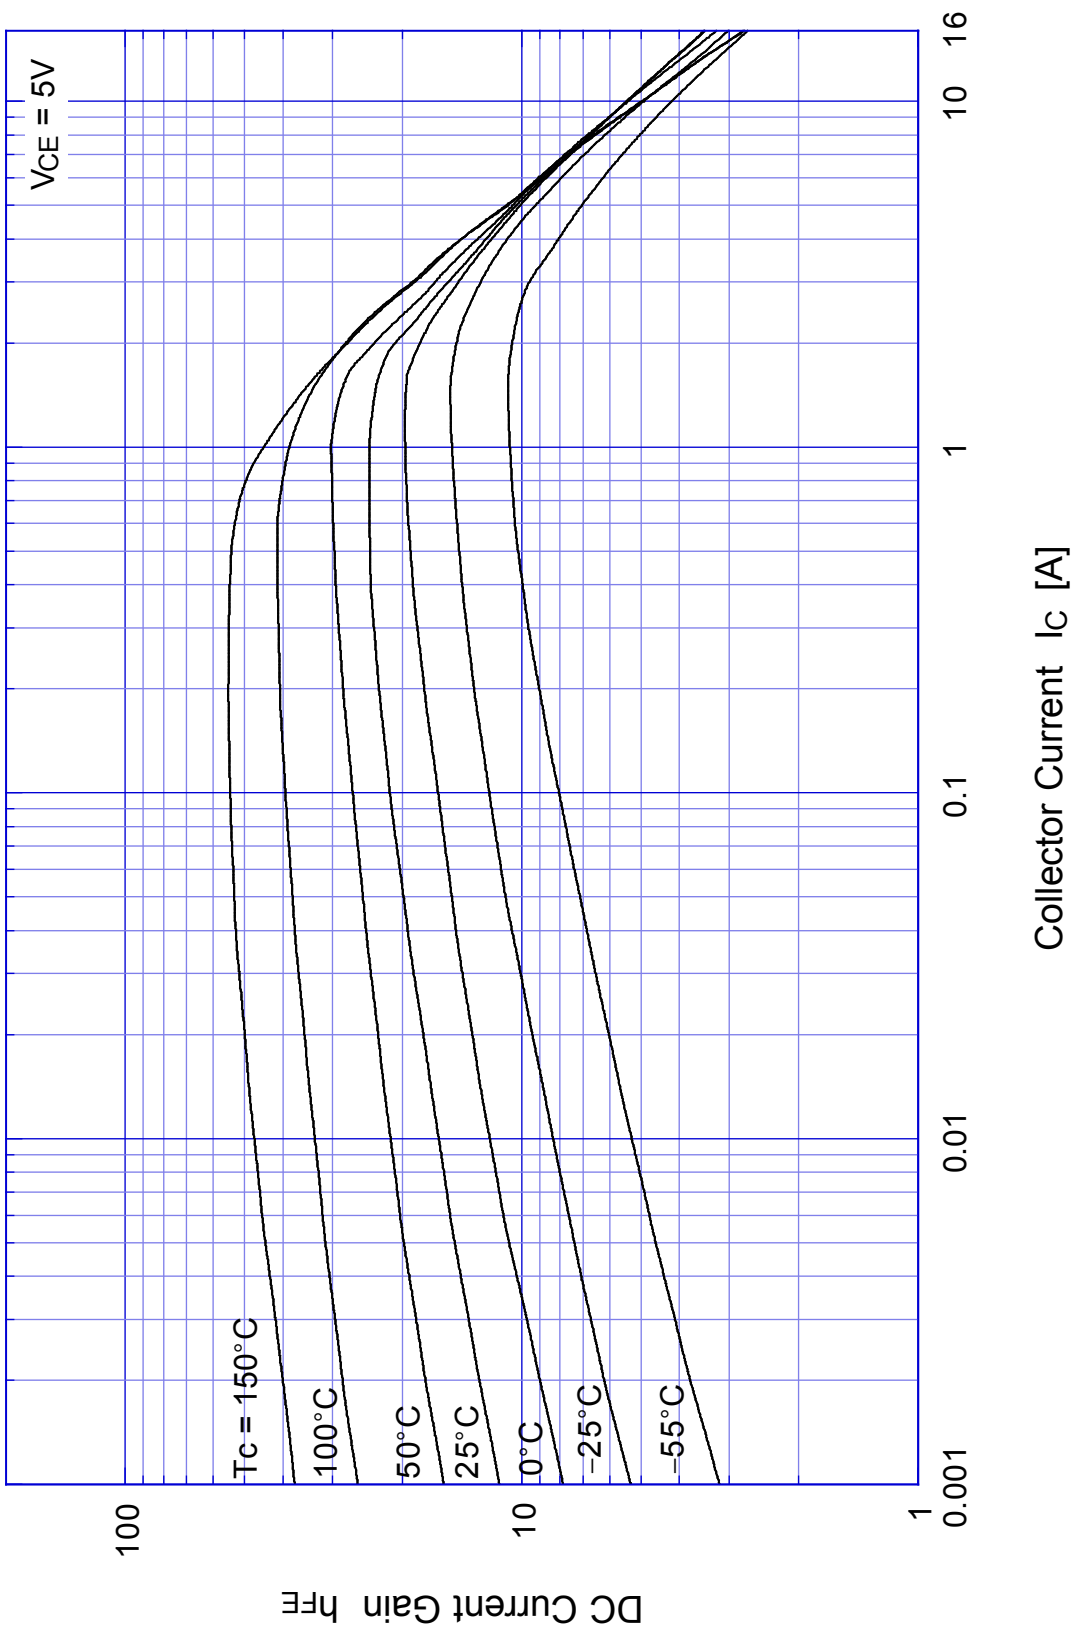


# 2SC4055 Saturation Voltage

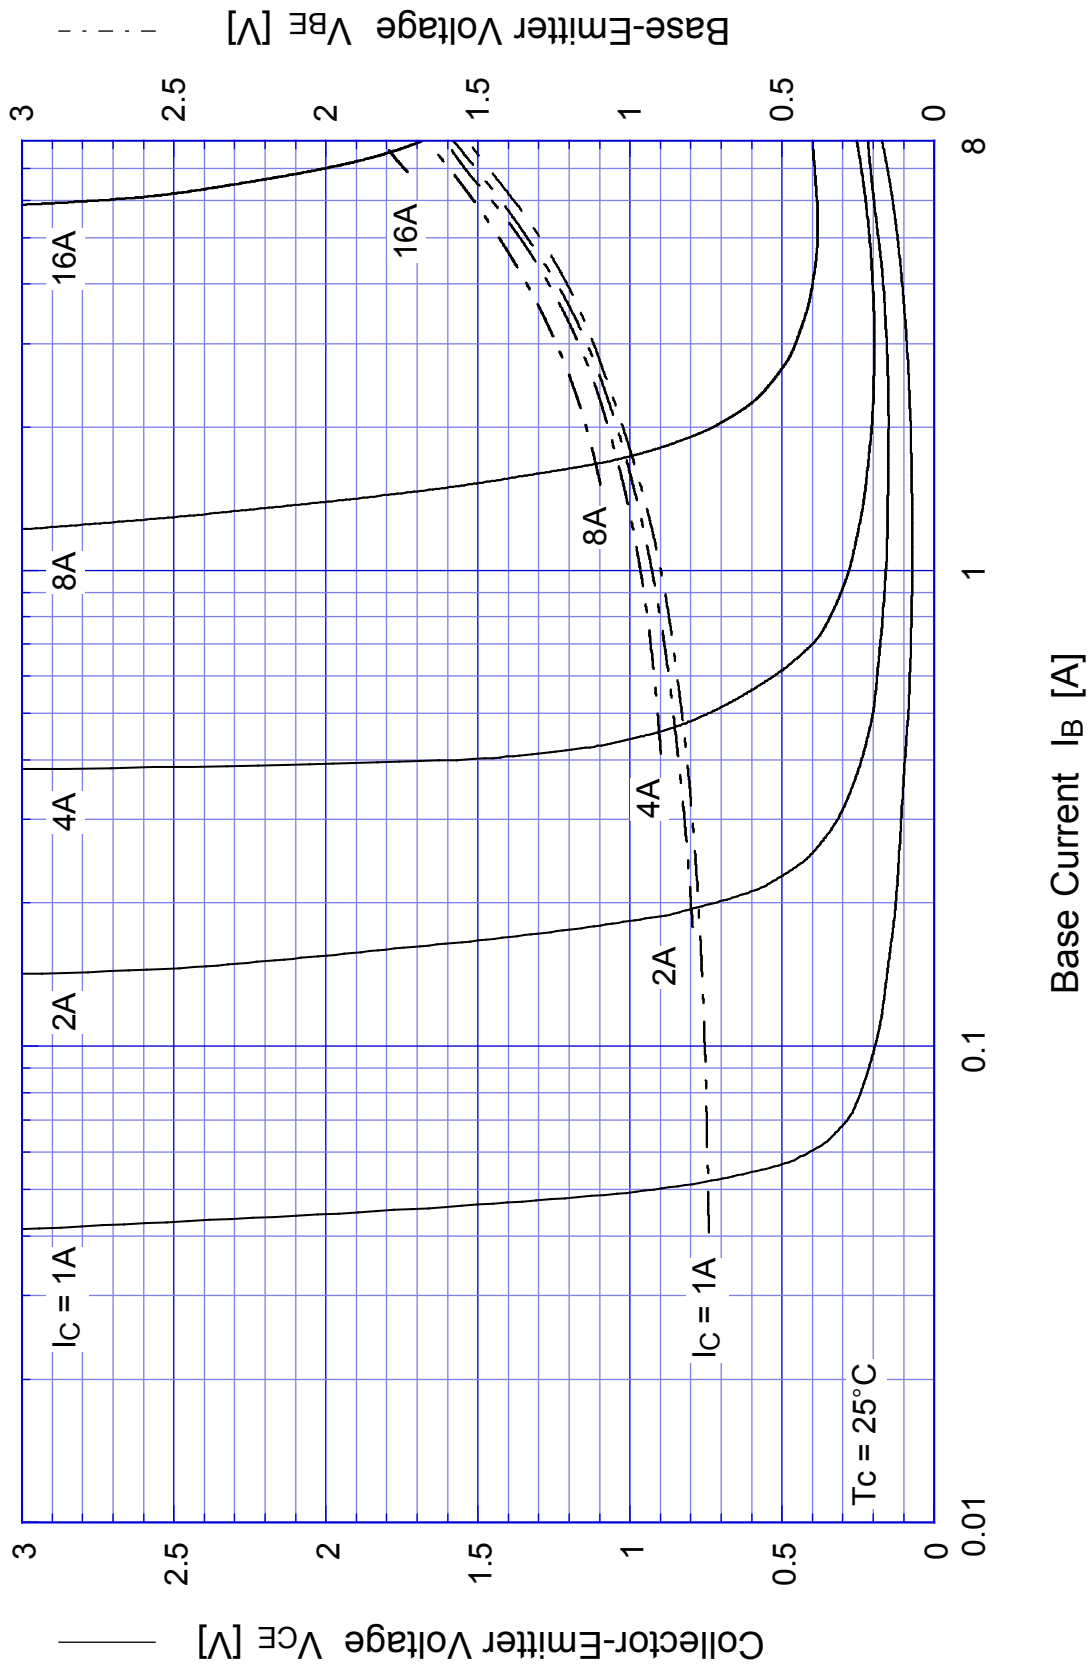


# 2SC4055

## Switching Time - $I_C$

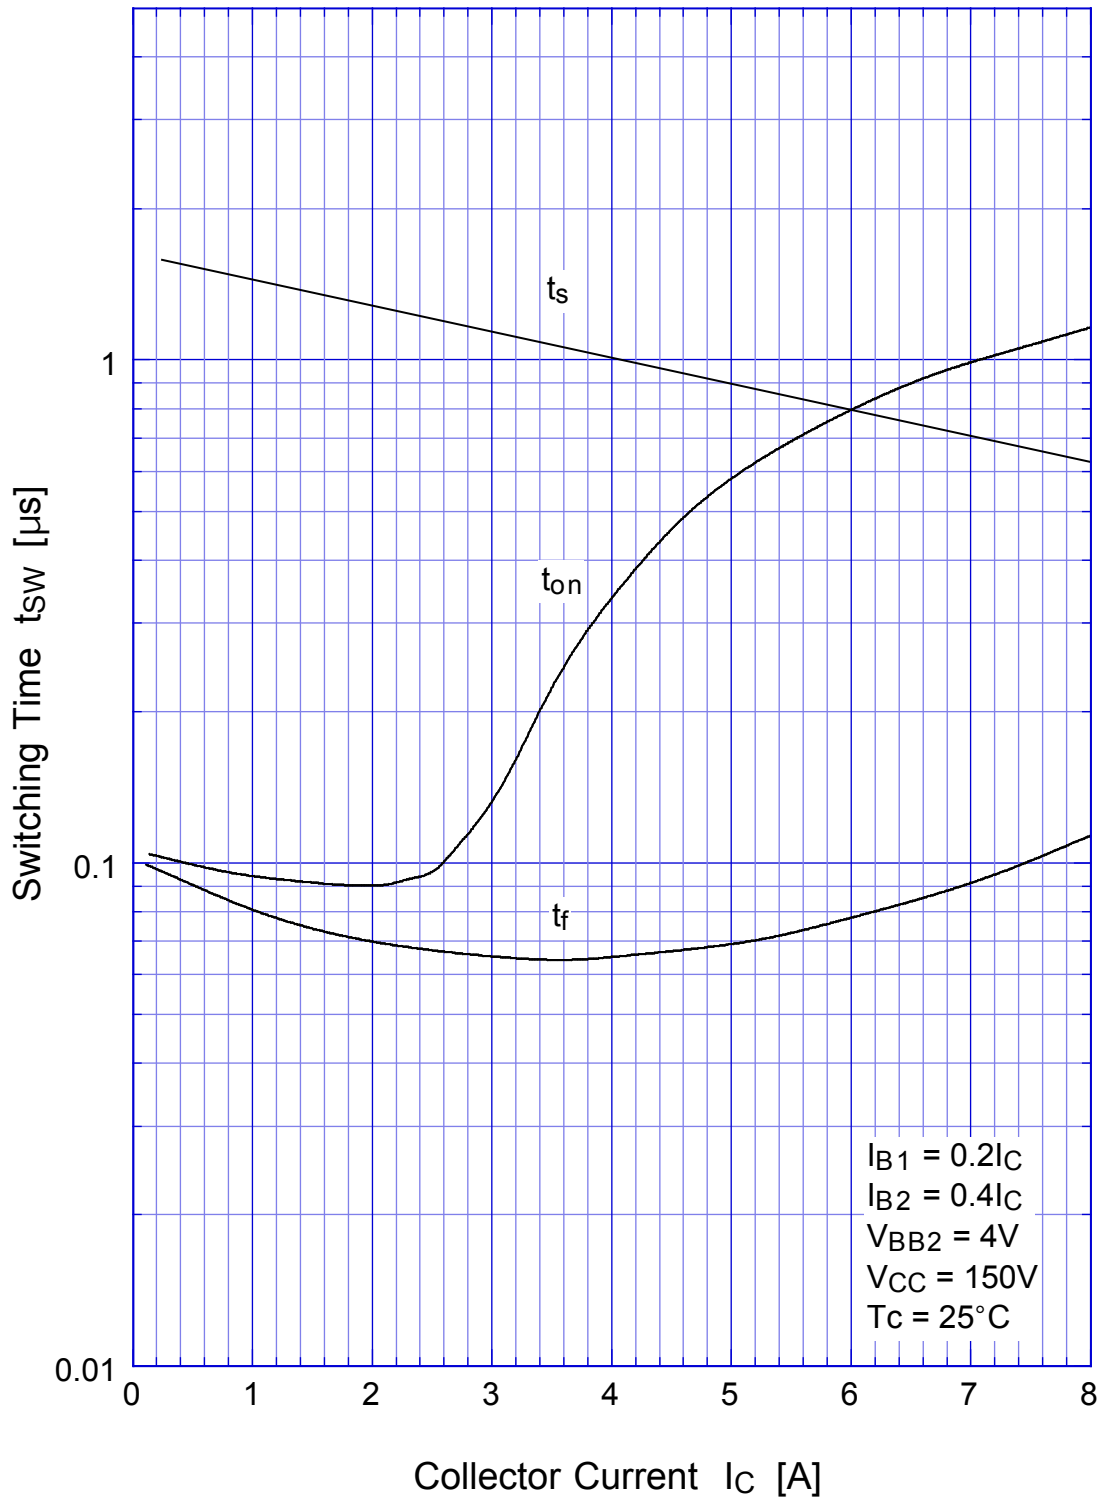


2SC4055 Switching Time -  $V_{CC}$

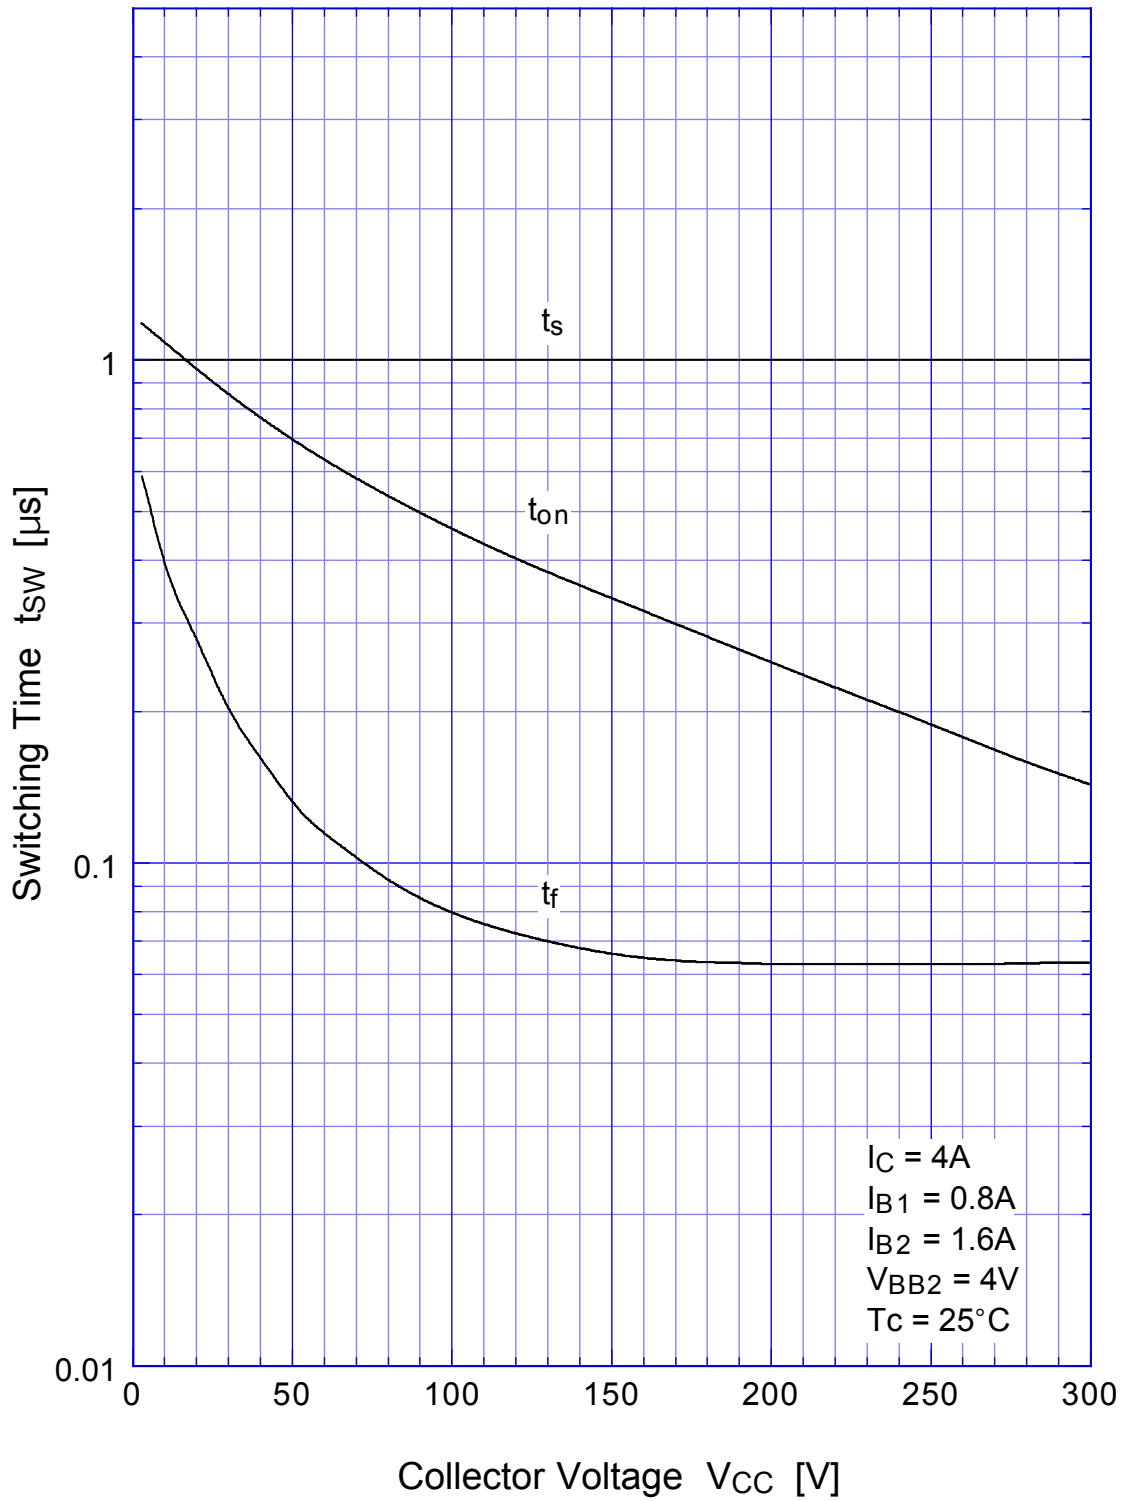


# 2SC4055


## Switching Time - Tc

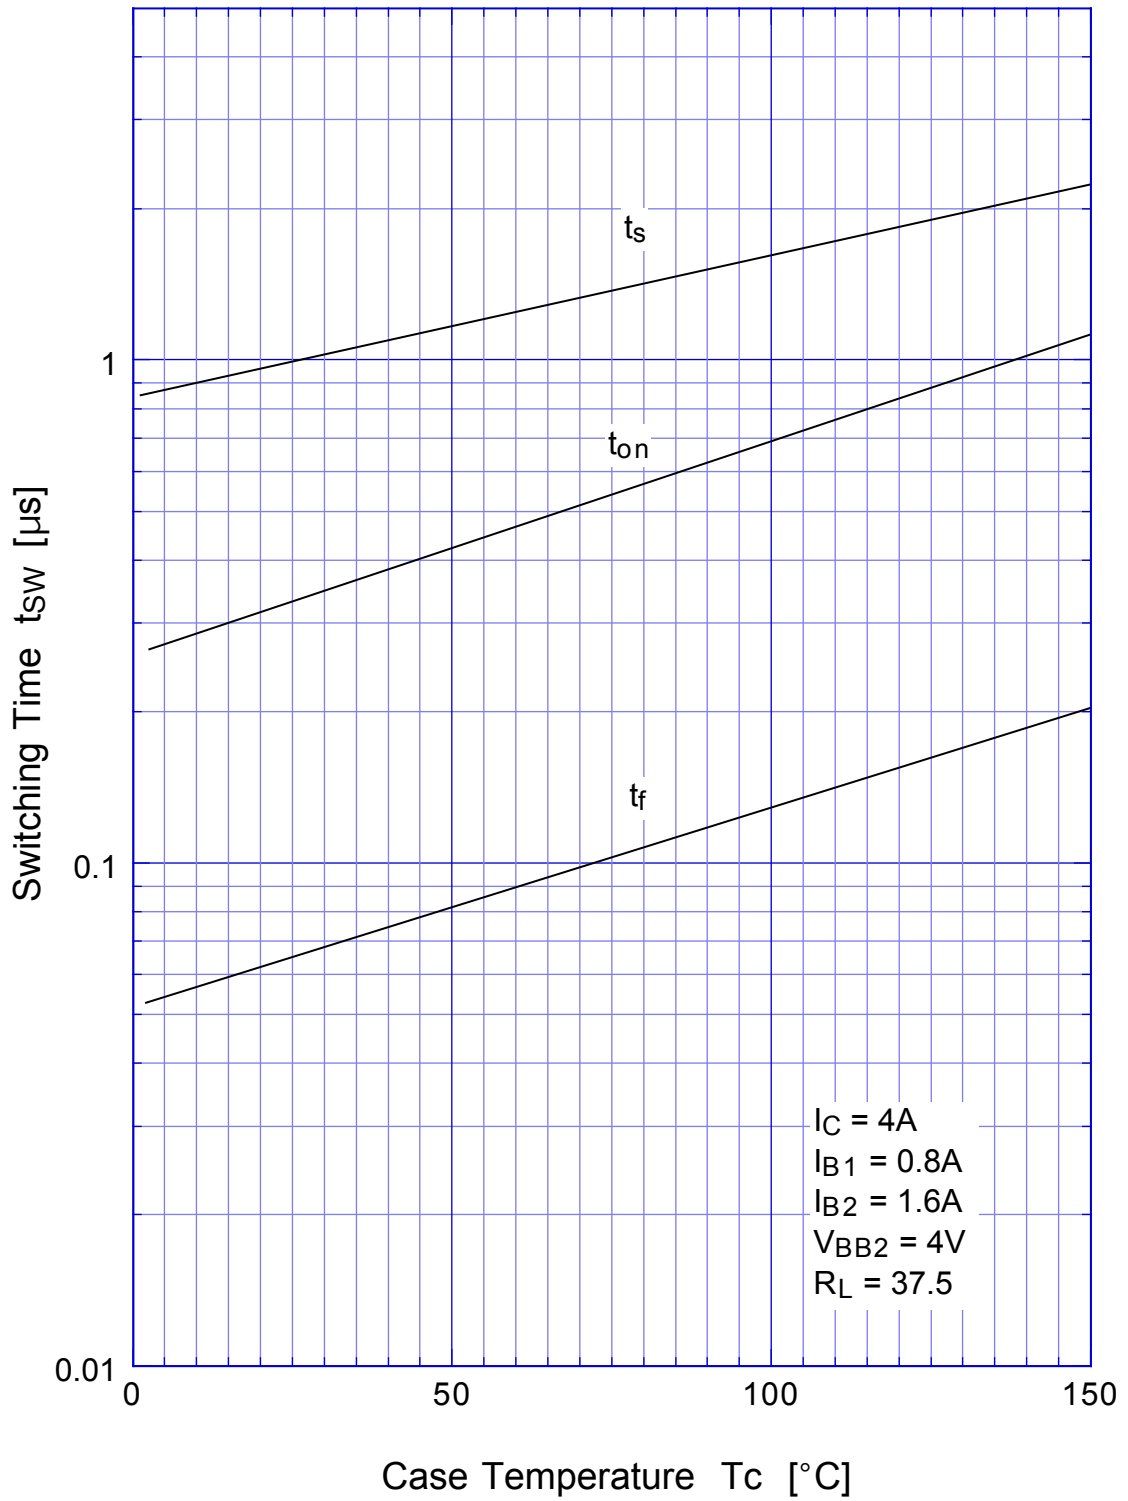


# 2SC4055 L-Load Switching Time - $I_C$

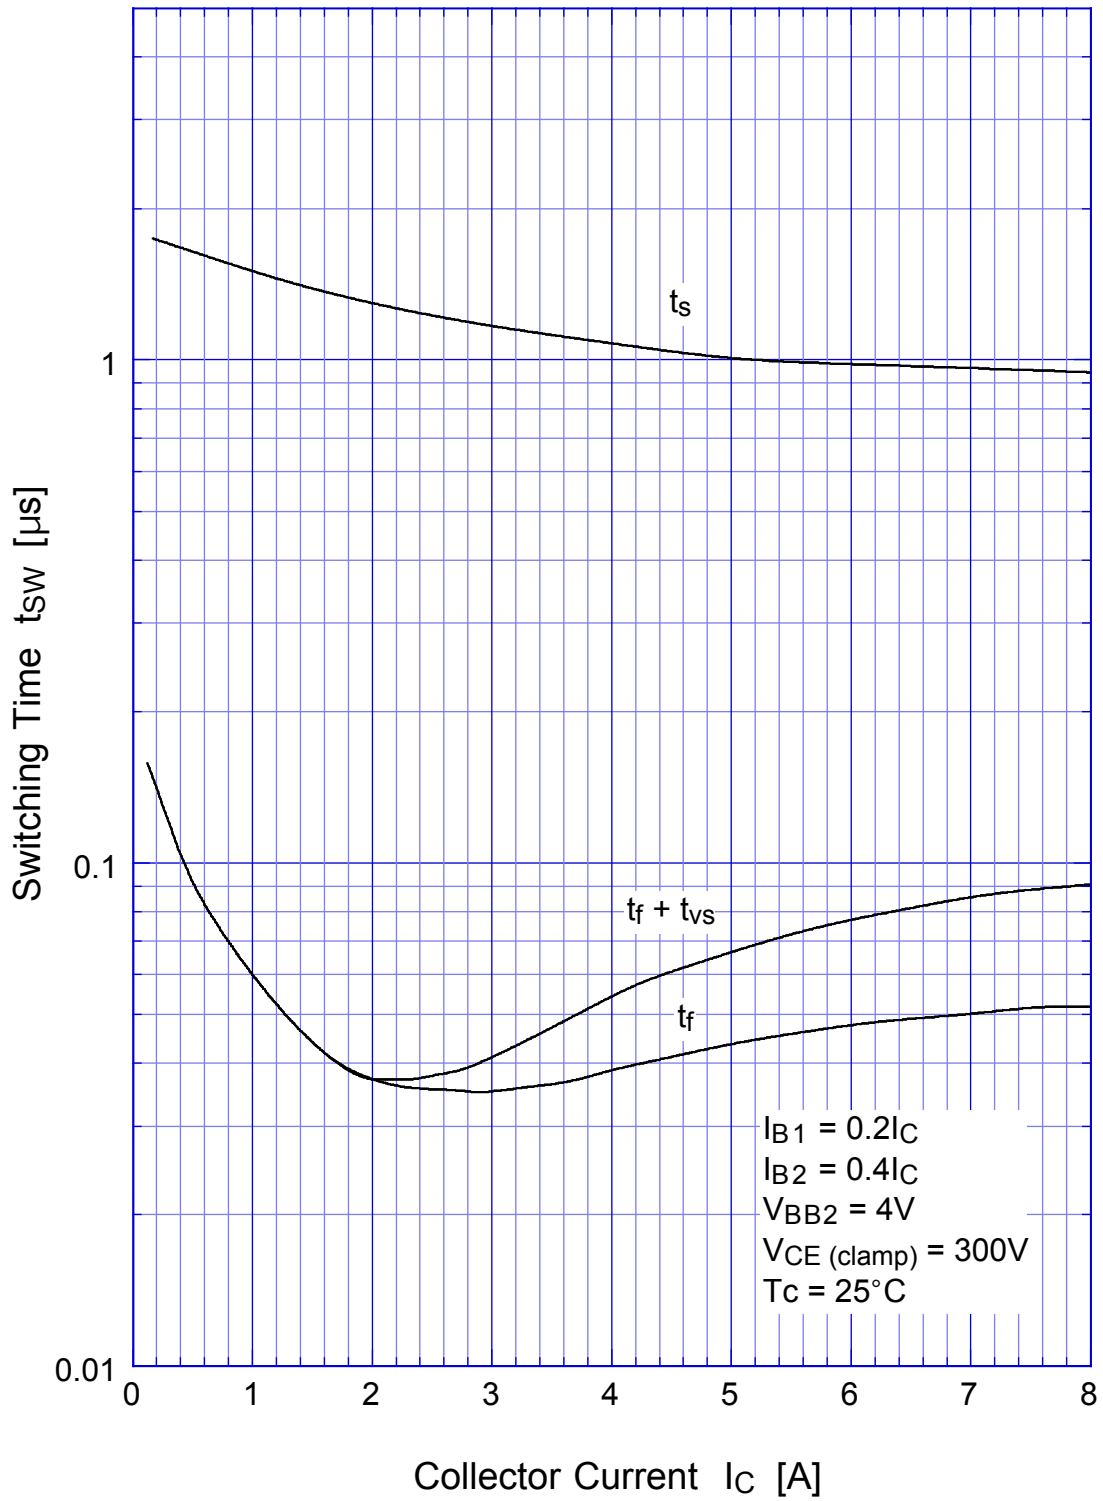

## 2SC4055 L-Load Switching Time - $I_C$ (At High Temperature)

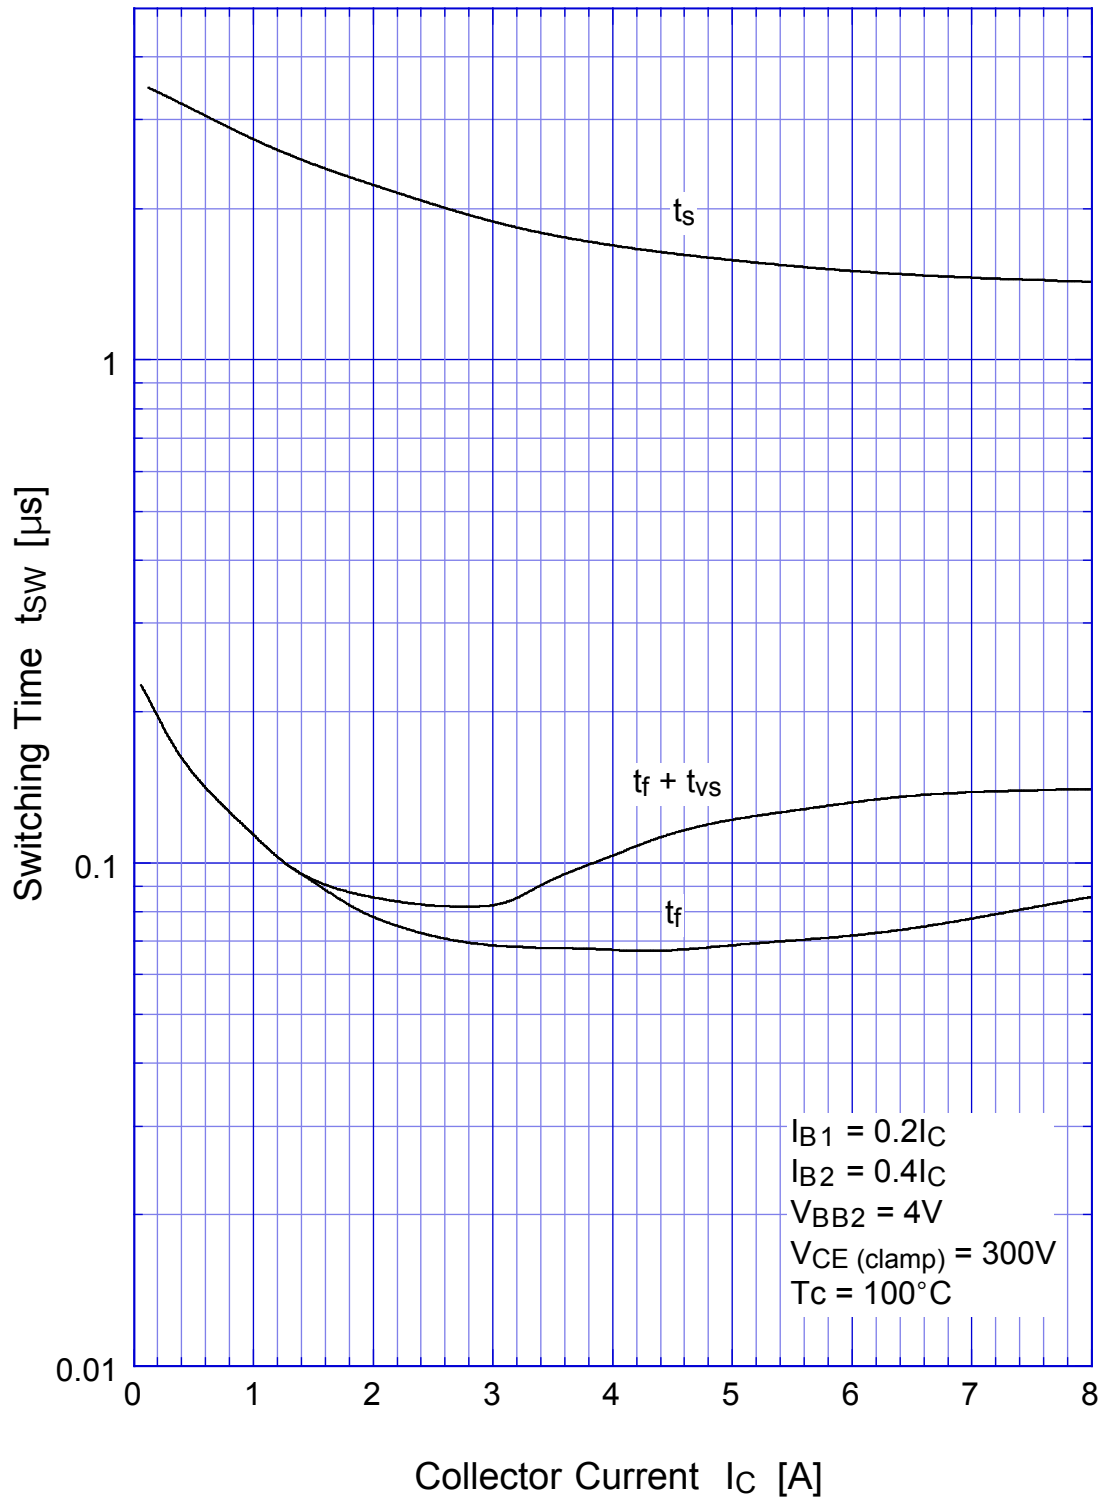


## 2SC4055 Transient Thermal Impedance

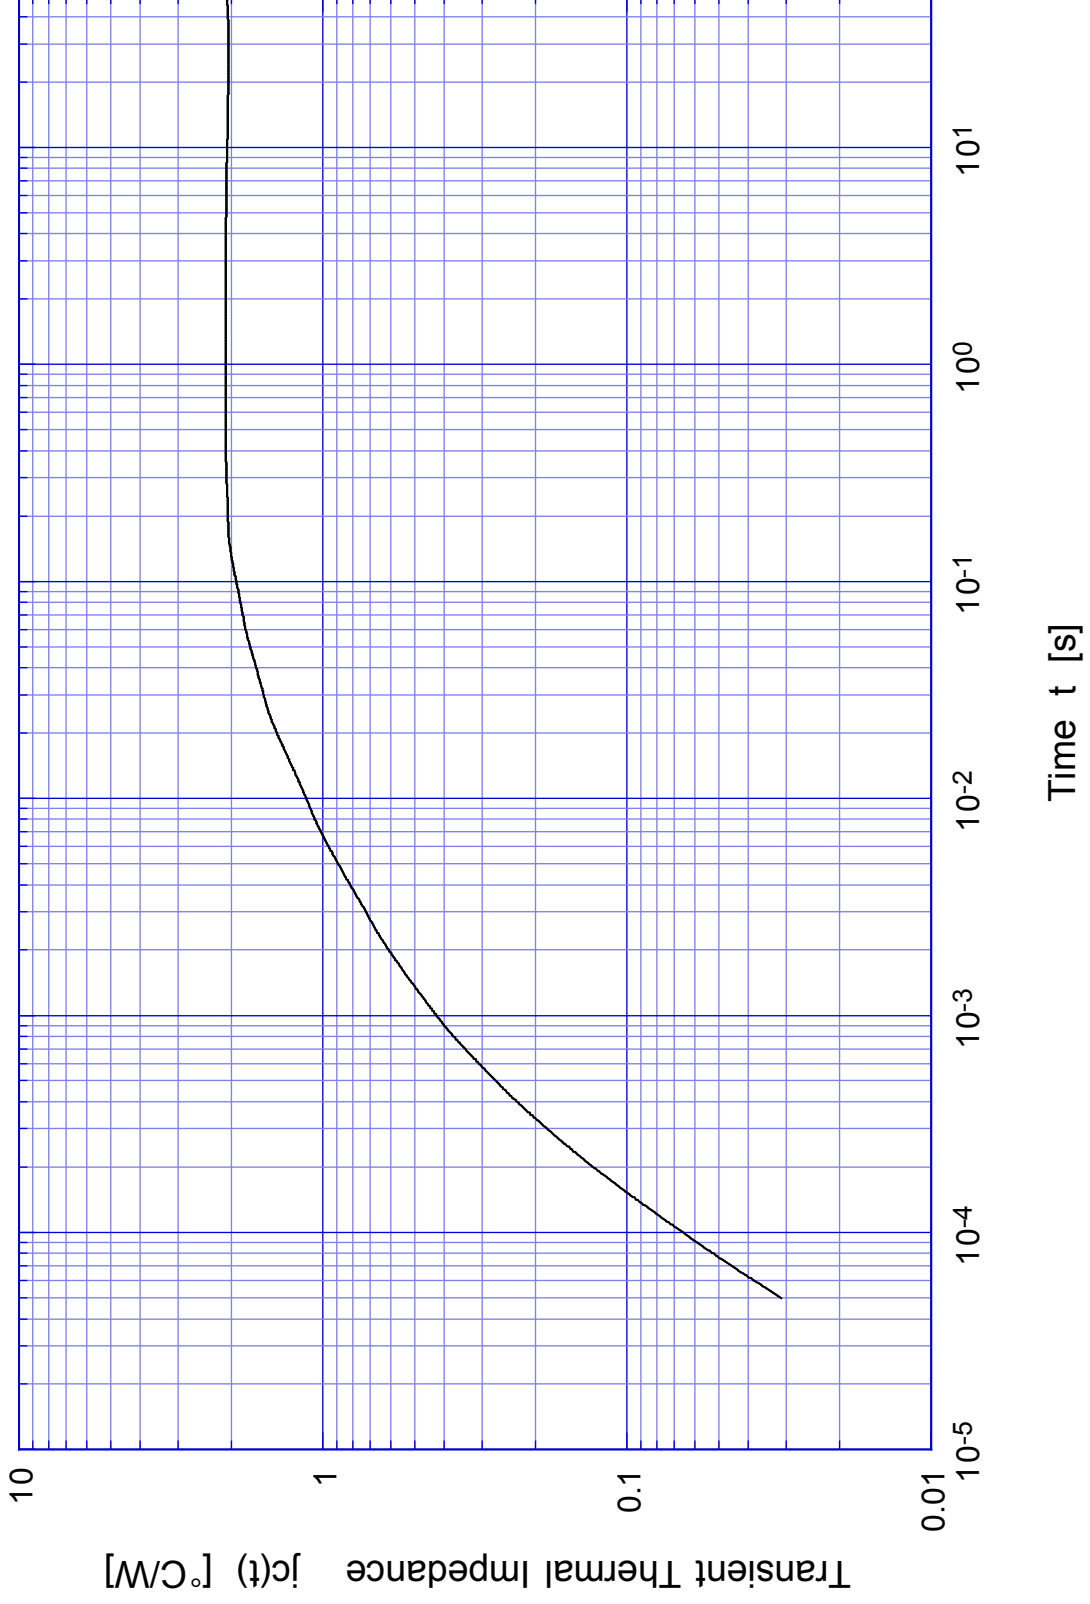


# 2SC4055

## Forward Bias SOA

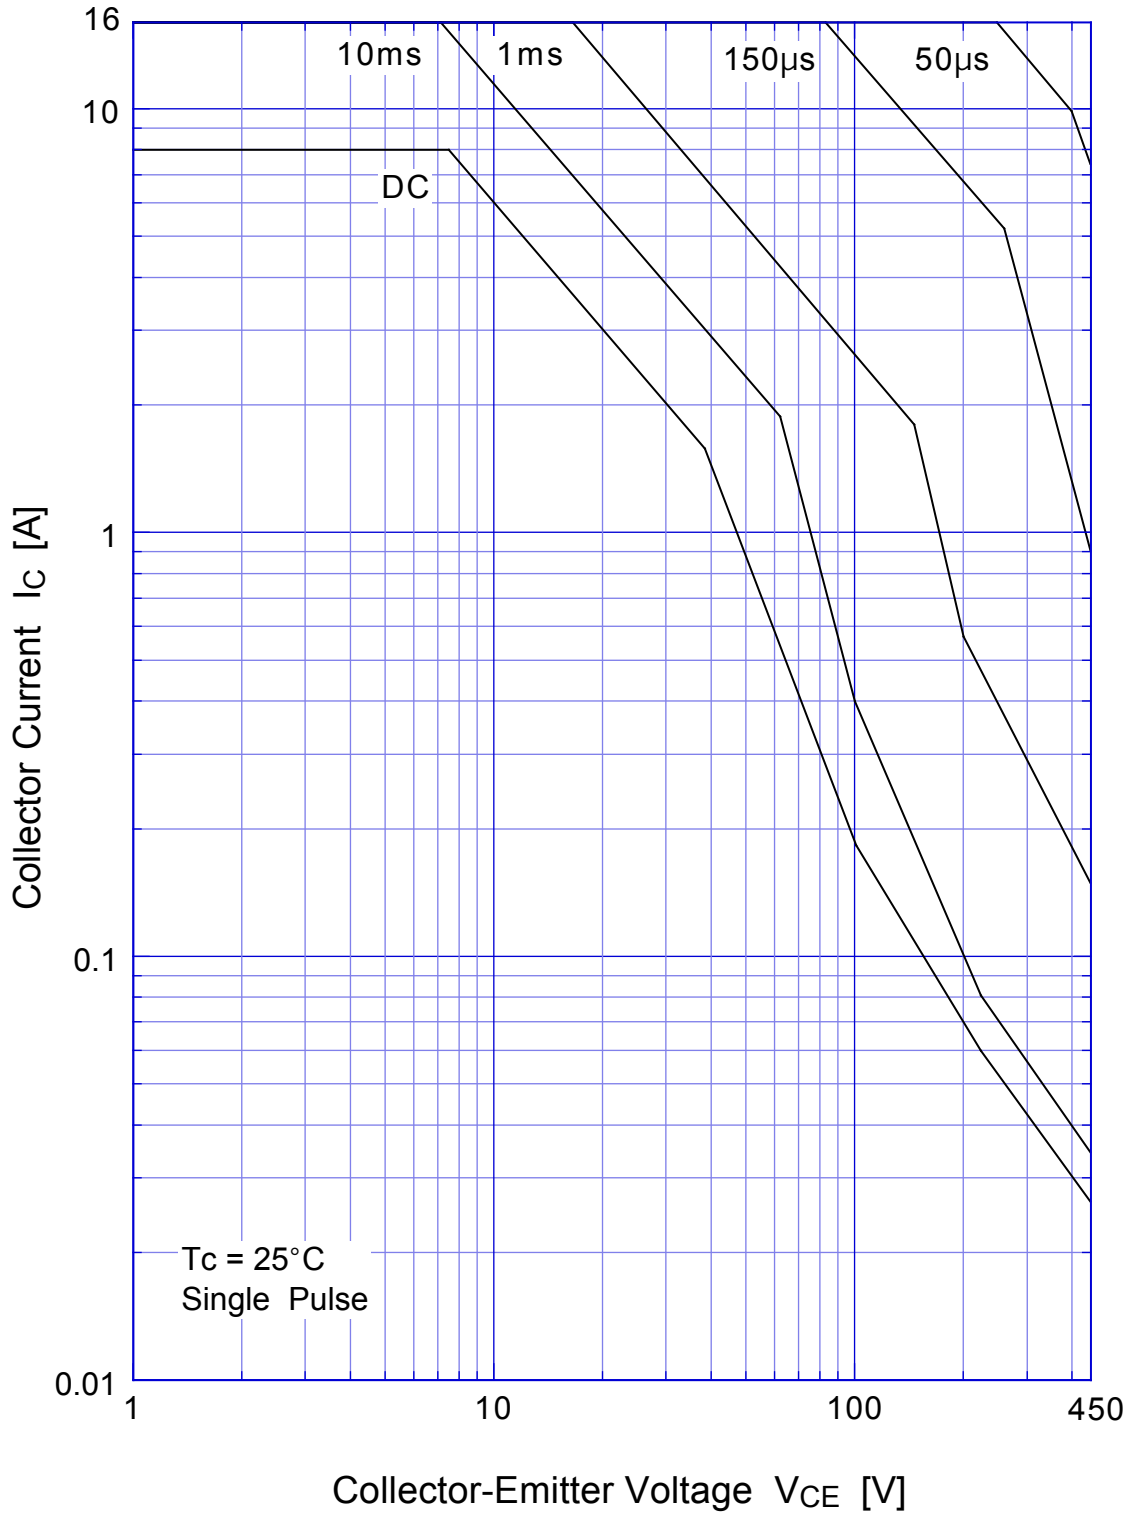

## 2SC4055 Collector Current Derating

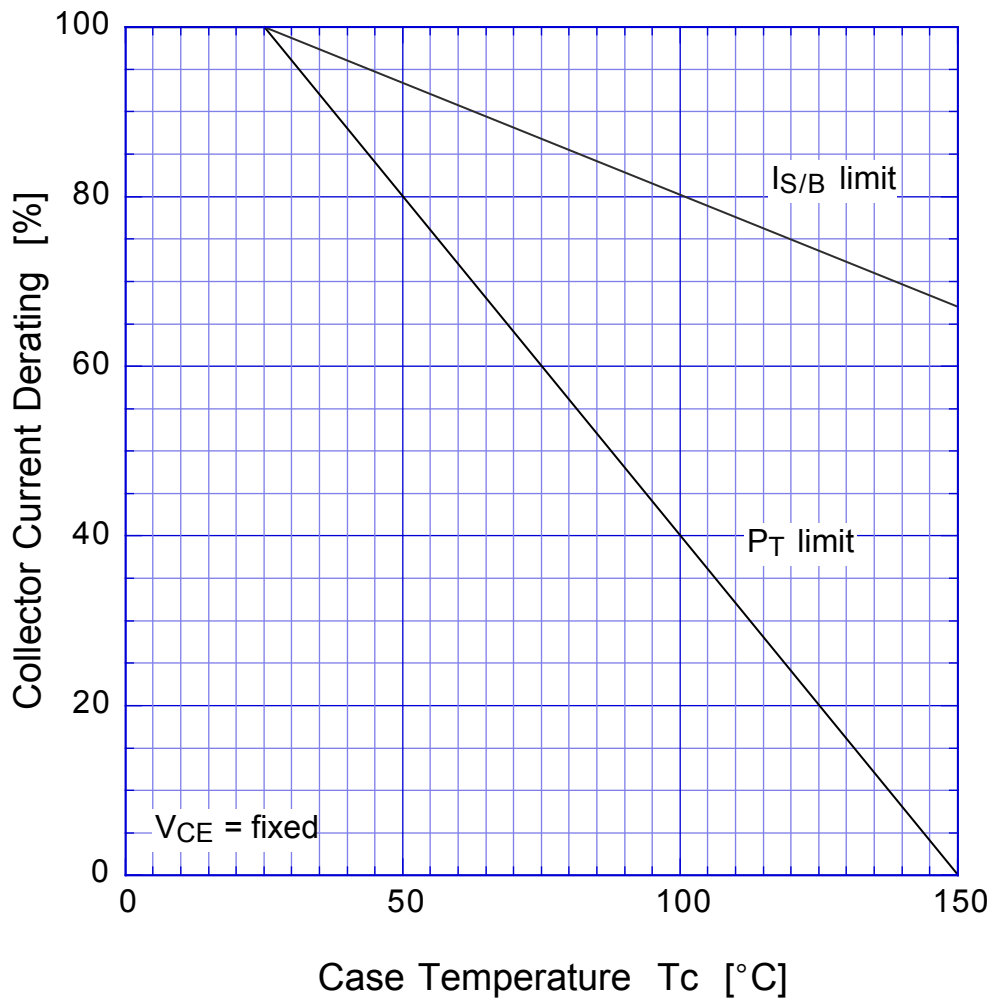

2SC4055

Reverse Bias SOA

